

⚠ Caution


Check before the installation

- _ This product is only for indoor use. Please do not use this product outside.
- _ Please install this product beyond the children' s / people in need of supervision' s reach.
- _ Please do not disassemble or convert this product for the safety reason.

Check after the installation

- _ Please do not put stuffs beyond the indicated withstand weight nor make a strong impact on this product to prevent the Table Board from damaged or dropped.
- _ In case of pulling the Table Board or clothes getting stuck with the Table Board, the Table Board could be dropped down or tension rod could come off to hurt the human body as well as damage the floor.
- _ Brass Screw should be certainly tightened and please check whether the Table Board could not be slipped down before the usage.
- _ As for the taints on wood, please wipe off with a damp soft cloth after wiring out and then, wipe off with a dried cloth.
- _ In case water or oil solution attach to this product, please immediately clean it.

Table Board (Main Body) x 1 piece



Brass Screw

Indoor Use only

Max. Withstand Weight
1kg / 2.2 lb

In case of calculating the withstand weight for Tension Rod, please include the weight of this product as 1kg (2.2lb).

Appearance Conditions

As natural wood is used, there are individual difference about the wood grain, knot, color and luster and so on.

The brass is not coated but ground color. The more this product is used, the more the color is changed.

The steal surface is matt finish in order to create a distinctive texture.

When some tips touch the surface, the surface get flawed.

Contact:



Tel: +81-6-6228-8984
Email: info@heianshindo.co.jp
WEB: www.heianshindo.com

MATERIAL

Table Board: Plywood, Urethane Coating
Sleeve Tube: Steel / Epoxy Powder Coating
Screw: Brass / Steel / ABS

DESIGNED IN JAPAN / MADE IN CHINA 240117P



DRAW A LINE

006

Table A


Manual Instruction



Installation Method


At last, please definitely practice the followings.

Before inserting this product into the pipes, in order not to damage the pipes, loosen the Brass Screw until the Tip of the Brass Screw is gone by checking the inside of the Sleeve Tube by eye.

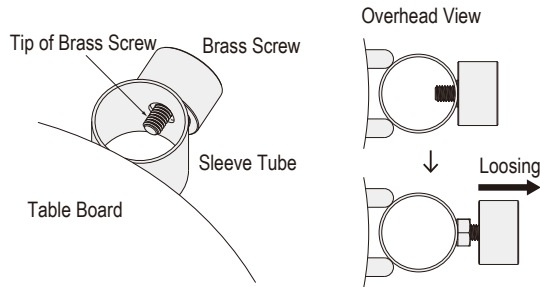


At last, please definitely practice the followings.

After installing Tension Rod, tighten the Brass Screw on the position & direction of the Table Board.



In case of installing into the Inner Pipe.

Before inserting the Table Board into Tension Rod, draw the Inner Pipe and insert the Table Board into the Inner Pipe with the right way up.

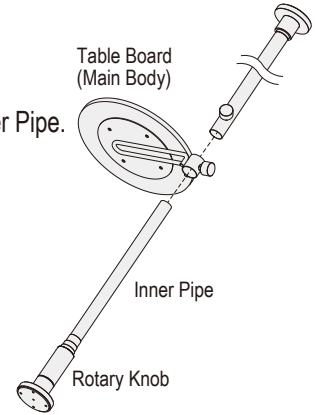

In case of installing into the Outer Pipe.

Before inserting the Table Board into Tension Rod, remove the Upper End Cap attached to the Outer Pipe and insert the Table Board into the pipe and put the Upper End Cap on the Outer Pipe.

*In case the Spring comes off, put the Spring on the Cross Shape Portion inside the pipe and put the Upper End Cap on the pipe.

