

⚠ Caution


Check before the installation

- This product is only for indoor use. Please do not use this product outside.
- Please install this product beyond the children's / people in need of supervision's reach.
- Please do not disassemble or convert this product for the safety reason.

Check after the installation

- Please do not put stuffs beyond the indicated withstand weight or make a strong impact on this product to prevent this product from damaged or dropped.
- In case of pulling this product or getting clothes stuck with this product, this product could be dropped down or tension rod could come off to hurt the human body as well as damage the floor.
- Brass Screw should be certainly tightened and please check that this product could not be slipped down before the usage.
- Please do not drape or put hazardous materials, valuables, fragile items or dangerous items on / around this product.
- If fragile materials such as silk or cashmere are tangled with Hook, the textile might be damaged.
- The friction might cause color migration to white shirts and so on.
- If wet stuff is draped, this product might be rusted

Hook (Main Body) (1 set)



Indoor
Use only

Max. Withstand Weight

2 kg / 4.4 lb
(per 1set)

Appearance Conditions

- The brass is not coated but ground color. The more this product is used, the more the color is changed.
- The steel surface is matt finish in order to create a distinctive texture. When some tips touch the surface, the surface gets flawed.
- As the Brass Screw penetrate into the pipes to fix the length of this product, the pipes get holes. Please enjoy the aging deterioration with your life.

Contact:



TEL: +81-6-6228-8984
MAIL: info@heianshindo.co.jp
www.heianshindo.co.jp/en/

MATERIAL

- Main Body:
Steel / Epoxy Powder Coating
- Screw: Brass / Steel / ABS

DESIGNED IN JAPAN
MADE IN CHINA

111217P



DRAW A LINE

015

Hook B


Manual Instruction



Installation Method


At first, please definitely practice the followings.

Before inserting this product into the pipes, in order not to damage the pipes, loosen the Brass Screw until the Tip of the Brass Screw is gone by checking the inside of the Sleeve Tube by eye.

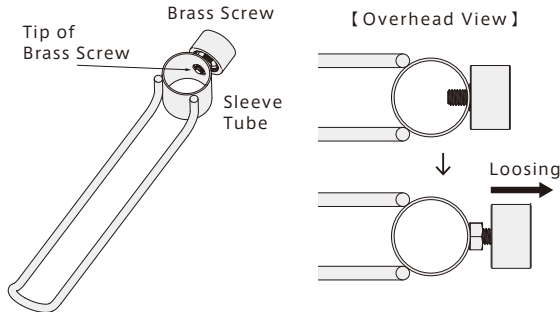


At last, please definitely practice the followings

After installing Tension Rod, tighten the Brass Screw on the favorite position & direction of the Hook.



● In case of installing into the Inner Pipe

Before installing Tension Rod, draw the Inner Pipe and insert the Hook into the Inner Pipe with the right way up.

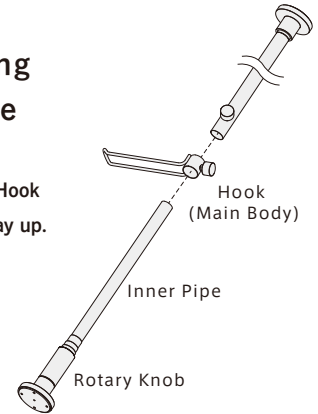

● In case of installing into the Outer Pipe.

Before installing Tension Rod, remove the Upper End Cap attached to the Outer Pipe and insert the Hook into the pipe and put the Upper End Cap on the Outer Pipe.

*In case the Spring comes off, put the Spring on the Cross Shape Portion inside the pipe and put the Upper End Cap on the pipe.

