

⚠ Caution


Check before the installation

- This product is only for indoor use. Please do not use this product outside.
- Please install this product beyond the children's / people in need of supervision's reach.
- Please do not disassemble or convert this product for the safety reason.

Check after the installation

- Please do not put stuffs beyond the indicated withstand weight or make a strong impact on this product to prevent this product from damaged or dropped.
- In case of pulling this product or getting clothes stuck with this product, this product could be dropped down or tension rod could come off to hurt the human body as well as damage the floor.
- Brass Screw should be certainly tightened and please check that this product could not be slipped down before the usage.
- Please wipe with a damp soft cloth and wipe with a dry cloth afterward.
- If water or oil adheres, please wipe immediately.

Tray (Main Body) (1set)



Brass Screw

Indoor
Use only

Max. Withstand Weight

2 kg / 4.4 lb
(per 1set)

Please calculate the load capacity of Tension Rod with this product as 0.5 kg / 1.1lb

Appearance Conditions

- The brass is not coated but ground color. The more this product is used, the more the color is changed.
- The steel surface is matt finish in order to create a distinctive texture. When some tips touch the surface, the surface gets flawed.
- As the Brass Screw penetrate into the pipes to fix the length of this product, the pipes get holes. Please enjoy the aging deterioration with your life.



DRAW A LINE

019

Tray

Manual Instruction

Contact:



TEL: +81-6-6228-8984

MAIL: info@heianshindo.co.jp

www.heianshindo.co.jp/en/

MATERIAL

- Main Body: Steel / Epoxy Powder Coating
- Screw: Brass / Steel / ABS

DESIGNED IN JAPAN
MADE IN CHINA


111217P



Installation Method


At first, please definitely practice the followings.

Before inserting this product into the pipes, in order not to damage the pipes, loosen the Brass Screw until the Tip of the Brass Screw is gone by checking the inside of the Sleeve Tube by eye.

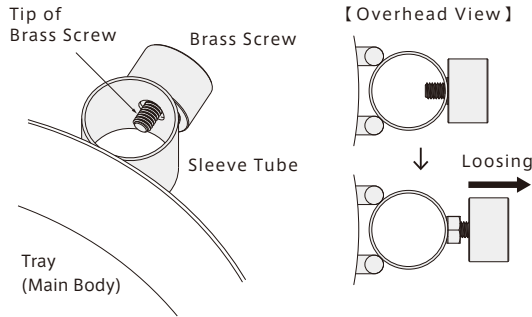


At last, please definitely practice the followings

After installing Tension Rod, tighten the Brass Screw on the favorite position & direction of the Tray.



● In case of installing into the Inner Pipe

Before installing Tension Rod, draw the Inner Pipe and insert the Tray into the Inner Pipe with the right way up.

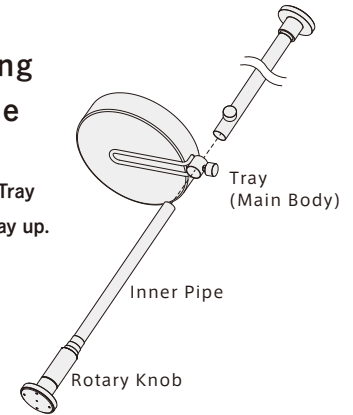

● In case of installing into the Outer Pipe.

Before installing Tension Rod, remove the Upper End Cap attached to the Outer Pipe and insert the Tray into the pipe and put the Upper End Cap on the Outer Pipe.

*In case the Spring comes off, put the Spring on the Cross Shape Portion inside the pipe and put the Upper End Cap on the pipe.

